


Swell Clay™ 200

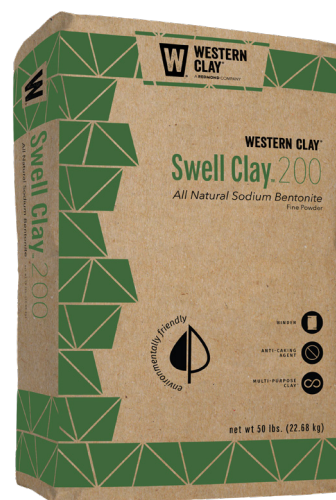

DESCRIPTION

Swell Clay is an all natural Monmorillonate (Hydrated Sodium Aluminosilicate)

APPLICATION

- Anti-caking agent
- Binder
- General Use

TYPICAL PROPERTIES

Color: Tan/red

pH: 8.5 - 9.0

Density: 70 lbs ft³ (compact)

Moisture: 6-12 wt. %

SIEVE ANALYSIS

This analysis is an average, variations can apply

Screen mesh % Passing

40	90
80	60
100	50
200	30

TYPICAL ELEMENTS

(parts per million)

Aluminum	80,300	Gadolinium	11.9	Scandium	4.9
Antimony	29	Gallium	5	Silicon	51,450
Barium	452	Germanium	5	Silver	0.5
Beryllium	3.8	Iodine	24	Sodium	28,900
Boron	19	Iron	6,370	Strontium	54
Bromine	6.1	Lanthanum	30	Sulfur	1,500
Cadmium	0.16	Lead	0.38	Tellurium	0.43
Calcium	17,425	Lithium	168	Thallium	0.66
Carbon	29,000	Magnesium	39,000	Thorium	3
Cerium	5	Manganese	880	Thulium	1.1
Cesium	1	Neodymium	55	Tin	4.13
Chloride	76,500	Nickel	5.7	Titanium	1,465
Chromium	4	Phosphorus	35	Vanadium	462
Cobalt	2.5	Potassium	8,600	Ytterbium	2.4
Copper	12	Praseodymium	20	Yttrium	14.7
Dysprosium	4.6	Rhenium	2.13	Zinc	105
Fluoride	18	Samarium	6.5	Zirconium	61

PACKAGING

Swell Clay is available in BULK and 3,000 lb. BULK BAGS and 50 lb. bags

To the best of our knowledge and belief, the above information is accurate. Because the conditions of handling and use are beyond our control, we cannot guarantee results, and assume no liability for damages incurred in using our product